

SET UP OF NETWORK ANALYZER HP 8753D

Plot Screen on disk or on a serial plotter

LOCAL

SET ADDRESS
PLOTTER PORT
DISK or SERIAL

SAVE-RECALL

SELECT DISK
INTERNAL DISK (floppy)

COPY

DEFINE PLOT
Select options (or leave as is)
PLOT (LOCAL to cancel)

**Writes an HPGL file on floppy disk
(PLOTXX.FP where $0 \leq XX \leq 31$)**

**Use CtrlView to open HPGL files
Copy screen to clipboard and
Paste where desired.**

Ref: <http://www.ctrlview.com/>

SAVE measured results on disk

SAVE-RECALL

SELECT DISK
INTERNAL DISK (floppy)
RETURN
DEFINE DISK SAVE
FORMAT ARRAY ON, DATA ONLY ON
SAVE USING ASCII
RETURN
SAVE STATE

**Generates an ASCII file. Open with Notepad
(DATAXX.D1)**

SET UP THE PENS IN CTRLVIEW

In CtrlView, select:


OPTIONS,

PREFERENCES,

HP-GL pens.

The following pen size

are used.

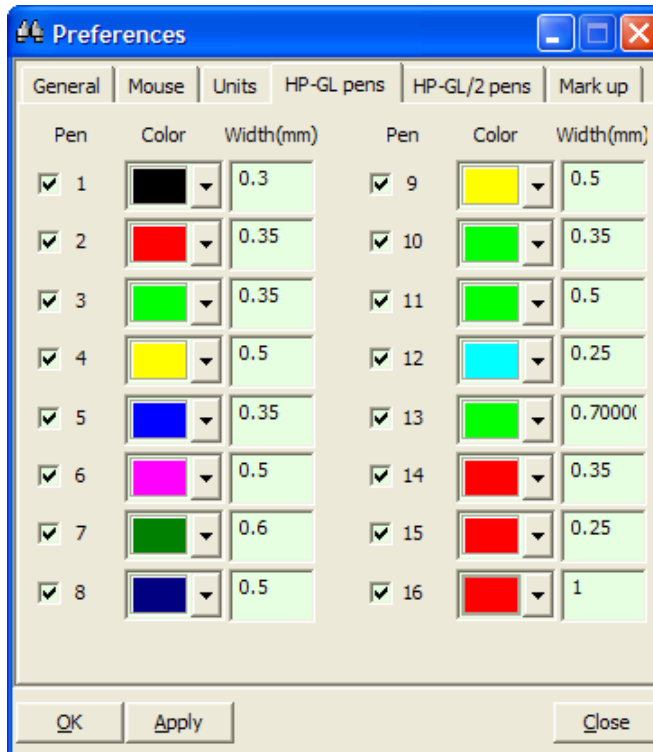

1 Apr 2008 16:25:14

CH1 S₁₁ SWR 200 m / REF 1

5: 1.4923

